


1 2 3 4 5 6

Total length (optional)

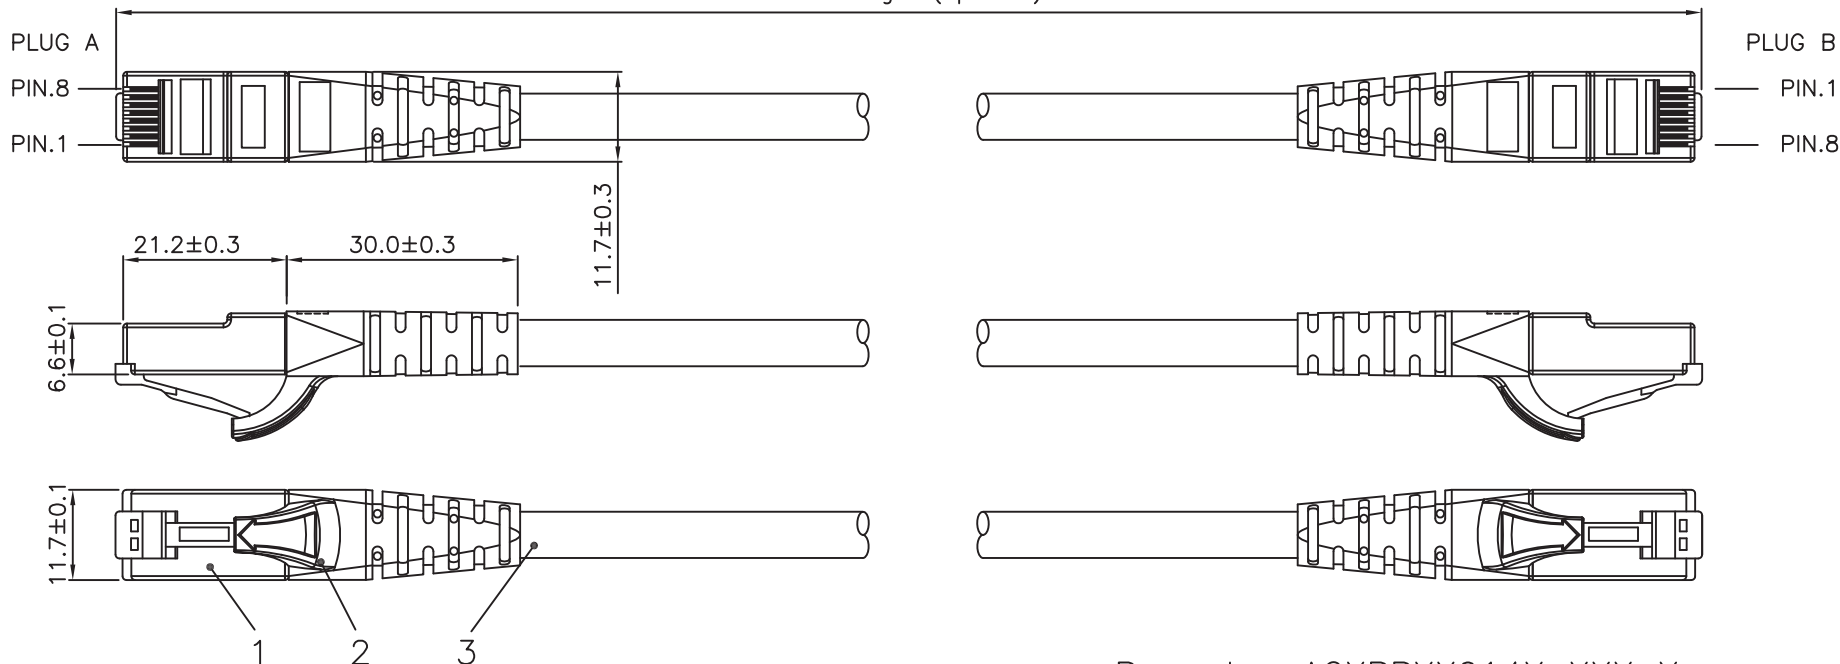

Specification :

Material :

- RJ45 Plug: (JE P/N: PF8850)
 - Housing: 1 row, Polycarbonate, UL 94V-2, transparent color.
 - Contact Pin material: Phosphor Bronze.
 - Contact Pin finished: Minimum 50 micro-inches Gold and Nickel Plated on surface contact area.
 - The structure complied with the IEC60603-7 requirement.
- Strain Relief: Boot molded type, PVC material.
- Cable:
 - C6 U/UTP 4 twisted pair.
The Cable performance complied with the ANSI/TIA 568C.2 requirement.
 - Jacket material & compliance:
 - Outer Diameter: 5.9 ± 0.2 mm
 - Material: low smoke zero halogen
 - Smoke; IEC61034-1, IEC61034-2
 - Halogen: IEC60754-1
 - Conductor: 24AWG bare Stranded Copper.
 - Isolation: HDPE
 - Isolation Cross Bar for 4 pairs : PE.

Performance:

- The performance complied with the ANSI/TIA 568C.2 C6 Patch Cord Channel requirement. the maximum length up to 20meters.
- Fire performance and LSOH according European CPR - Eca standard
- ROHS and REACH standard.

Remark : ACXBBXX014X XXX X
(1) (2) (3) (4) (5)

- X : Jacket Material
A=PVC B=LSOH
- XX : Jacket Color
01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
11=Pink(RAL4003)
- X : Wiring
1=T568A, 2=T568B, 3=T568A & T568B combination
- XXX : Length
- Length Unit : 1=cm, 2=meter, 3=feet.
(4)(5) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
0033=3feet, 0103=10feet

JE 應用工程

2017.12.07

發行

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		05.DEC.2017		SP		 JYH ENG TECHNOLOGY CO.,LTD						
	CHECK		05.DEC.2017		YUAN								
	APPROVAL		05.DEC.2017		YTY								
				DATE		NAME		ITEM NO.: ACBBAXX014XXXXX					
	SCALE		1/1 (A4)		UNIT		mm		DES.: C6 U/UTP w/ Protector Patch Cord				
				DRAWING NO.		ACBBAXX014XXXXX(SA4)							
				DRAWING CLASSIFICATION			S		SHEET				

1 2 0 3 4 10cm 5 6